




# IPP-83A0036MIA

SKU: 220202

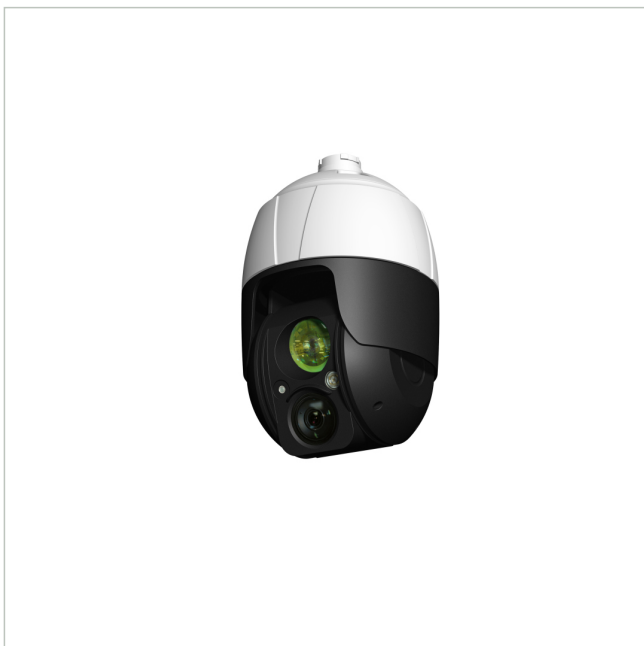

1/2,8" Network Dome, PTZ, Day&Night, 36x, H.265, WDR, 2048x1536, Infrared, IP66

## Main Features

1/2.8" Sony STARVIS CMOS-Sensor

3.0MP 2048x1536 Pixel, 25/30fps

36x AF Zoom, 4,6~165,6mm

Quad Stream H.265, H.264, MJPEG (Smart Codec)

Real time WDR (Wide Dynamic Range) 25/30fps

Intelligent self learning video analysis

Digital Noise Reduction (2DNR/3DNR)

Audio support including audio alarm

Infrared illumination up to 200m

Alarm in- and outputs, micro SD-card

Power supply 12VDC or UPoE (High-PoE Midspan included)

Support ONVIF Profile S und Profile T

## Specifications

Dimensions (HxWxD)	317,8x201.8mm
Series	eneo SN-Series
Resolution Standard	3 Megapixel
System	True Day&Night
Sensor size	1/2.8"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG
Image resolution max.	2048x1536
Image Transmission Rate	30 fps
Day&Night Switch	ICR

# IPP-83A0036MIA

Continuation of the specifications

Sensitivity	0,35 Lux
Sensitivity 2	50 IRE, at F1.6
Low Speed Shutter	yes
Digital Noise Reduction	yes
Backlight Compensation	Smart BLC
Wide Dynamic Range (WDR)	WDR 120dB
Motion Detector	yes
Lens Type 2	auto focus zoom
Focal Length	4,6 - 165,5 mm
Iris Control	DC
Zoom Factor	36x
Digital Zoom	yes
Horizontal Angle of View	58,1 - 1,9°
Vertical Angle of View	43,5 - 1,4°
Illumination	infrared
Housing	outdoor
Color (housing)	black, white
Housing material	aluminium
Heater	no
Blower	yes
Rotation range	360°
Speed (manual)	380°/Sek.
Speed (preset)	380°/Sek.
Video outputs	no
Alarm inputs	4
Alarm outputs	1
Audio support	yes
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	microSDHC card, microSDXC card
Analysis functions	Defog, Digital Image Stabilization, intrusion, loitering detection, motion analysis, motion detection, Person recognition, tampering protection, Trip wire plus object counting
Mounting_4	ceiling mount, wall mount
Supply voltage	12VDC, PoE
Power consumption	28W
Power over Ethernet	HiPoE+
Vandal proof	no
Operating temperature	-30°C ~ +55°C
ONVIF	ONVIF Profile S, ONVIF Profile T
Protection rating	IP66

# IPP-83A0036MIA

Continuation of the specifications

Camera built	PTZ
Audio	2 Way Audio
Remote configuration	web browser
Illumination range	approx. 200m
Weight	5.1kg
Manufacturer order number	220202

## Optional Accessory

SKU	Name	Description
222024	AKM-1	Connection box with bracket outdoor, Fixed and PTZ Dome cameras, IP66
220504	EDC-CMA2-W	Corner Mount Adapter white for EDC-WMB1-W
220313	EDC-CMT1-W	Ceiling Mount Tube, white, with Flange for PTZ Dome Cameras, with Mounting Kit
220492	EDC-PM7-W	Pole Mount Adapter for EDC-WMB1-W, white
220314	EDC-WMB1-W	Wall Mount for PTZ Dome Cameras, white, with Mounting Kit
218218	eneo Site Manager	Management Software for eneo IP products

## Optional Services

SKU	Name	Description
229234	CON-KAM-IPKON	Preconfiguration 1x IP camera Function test, FW update
214441	CUS-SL-GK	Painting basic costs once per RAL color and delivery lot
211124	CUS-SL-P	Extra charge for special paint PTZ dome or panoramic camera in RAL color

# IPP-83A0036MIA

## Your contact person

SLD Security & Communications Ltd.  
101 Eden Grove Road  
KT14 7PX Byfleet Surrey  
GB  
Tel: +44.7973112104  
E-Mail: [enquiries@sld.uk](mailto:enquiries@sld.uk)  
Web: [www.sld.uk](http://www.sld.uk)



SLD Security & Communications

Secure by Design